

# DRYER BRACKET INSTALLATION INSTRUCTIONS

## **STEP 1: Mounting Position**






If fixing dryer upside down you will need to change the control panel. Refer to your dryer booklet for instructions.

1320mm recommend distance to floor

# **STEP 2: Mark & Drill holes for Fixing**




2090mm minimum distance to floor

#### **STEP 3: Fastening**


Fasten galvanised bracket to wall using screws provided. Wood screws for timber framed walls. Masonry screws for concrete/brick walls.

## **STEP 4: Fixing to a Timber Stud**

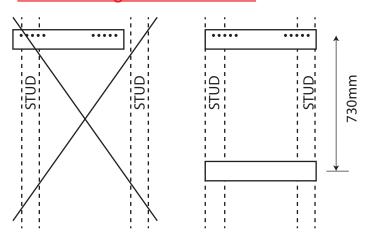

Bracket must be fastened securely at both ends. Fit timber battens to span wall studs if required.

# **STEP 5: Fit Plastic Spacer Legs**

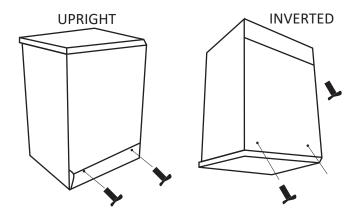

Remove indicated screws on dryer and fit plastic spacer legs with 8gx25mm screws as supplied with kit.

#### **STEP 6: Mounting Dryer to Wall Bracket**

More than one person to lift dryer into place.

