





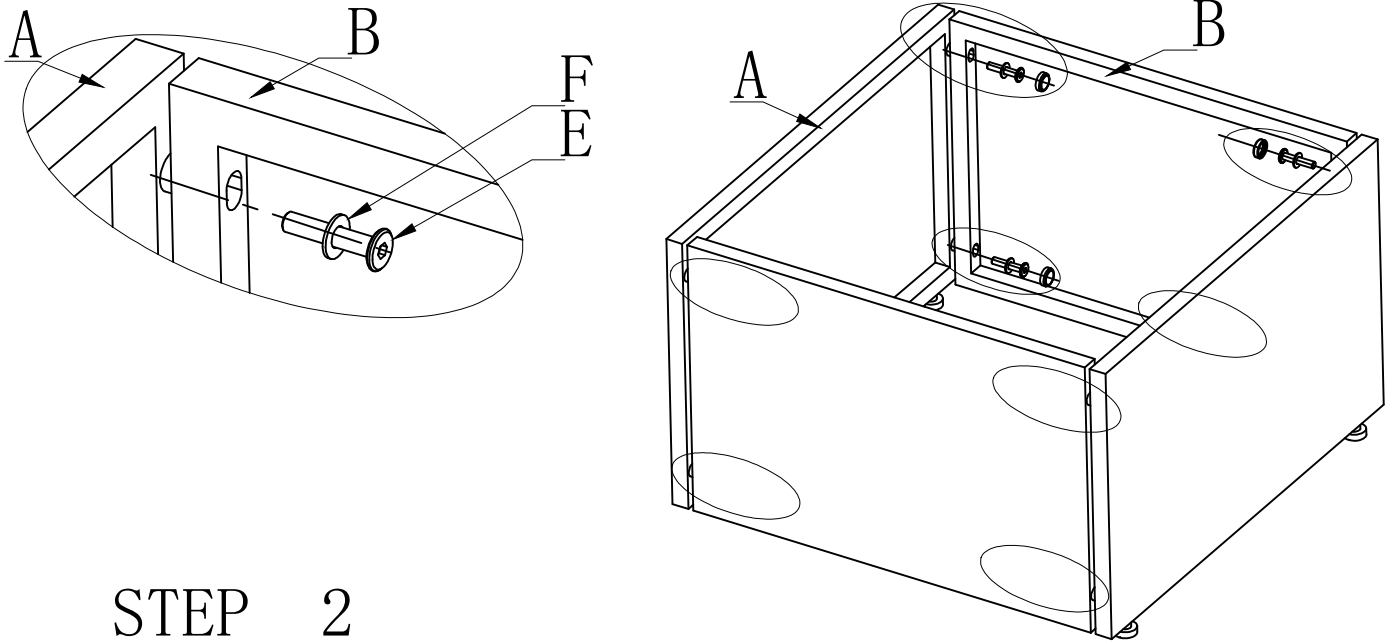


A	 Long frame	2
B	 Short frame	2
C	 Cover board	1
D	 Glass	1
E	 Bolt M6*30mm	10
F	 Washer Φ 13*Φ 6.5*1.0mm	10


STEP 1

Join the long frame(A) with short frame(B), using bolts(E). Once all bolts are in position tighten securely using Allen Key.




STEP 2

Place the cover board upside on a clean, protected surface. Place the assembled frame on top of the cover board and secure using bolt(F). Tighten securely with Allen Key.

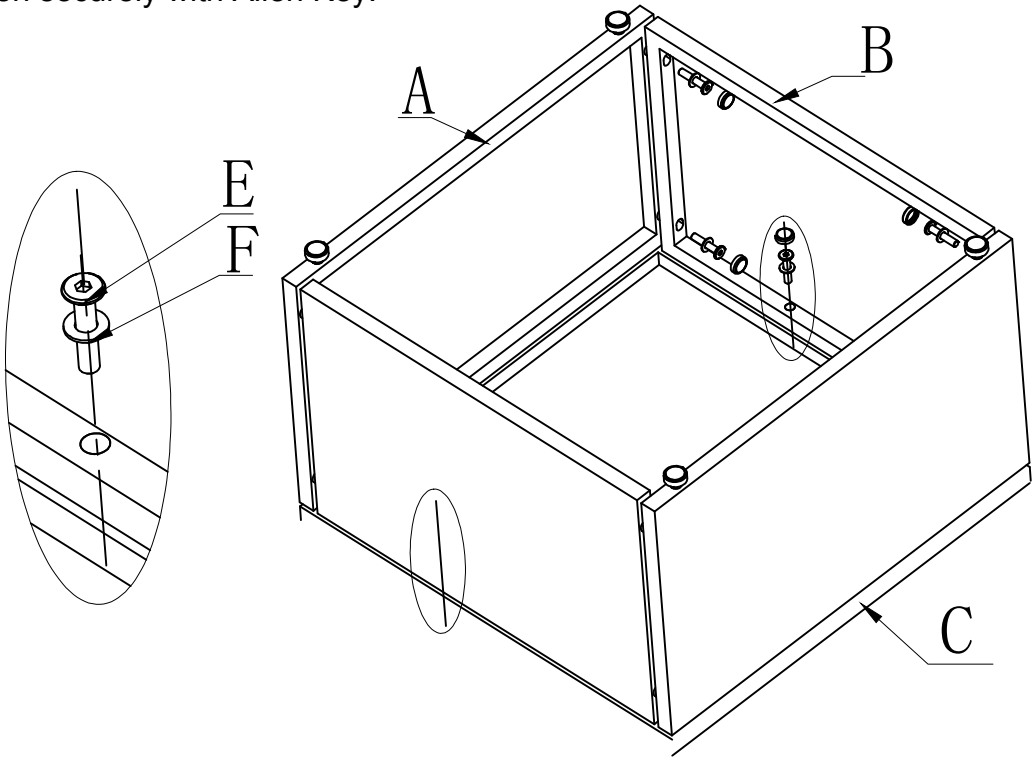


Carefully place the glass on top of the coffee table.

STEP 3




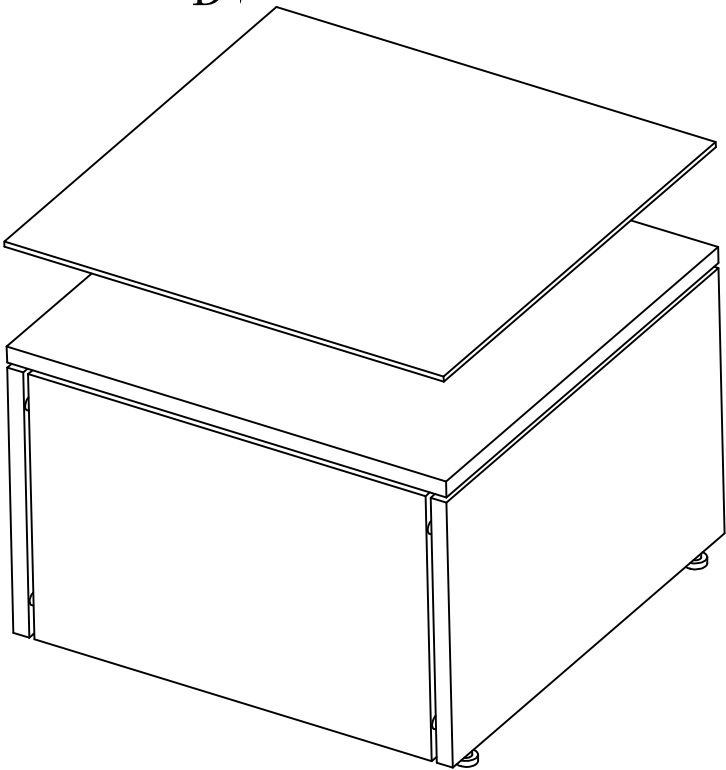






STEP 4

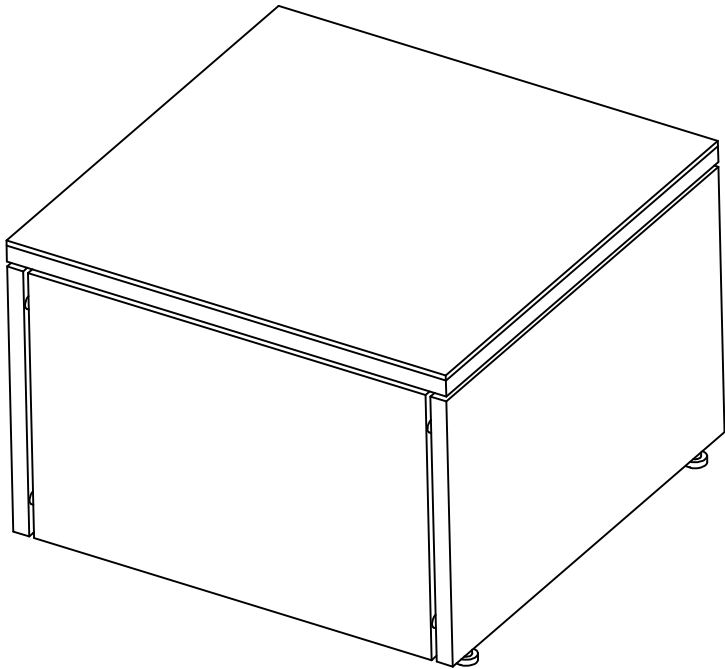
Your coffee table is now ready for use



Chaise lounge


A		1
B		1
C		1
D	 Bolt M6*60mm	7
E	 Washer Φ 13*Φ 6.5*1.0mm	14
F	 M6 nut	7
G	 Back cushion	1
H	 Seat cushion	1

STEP 1

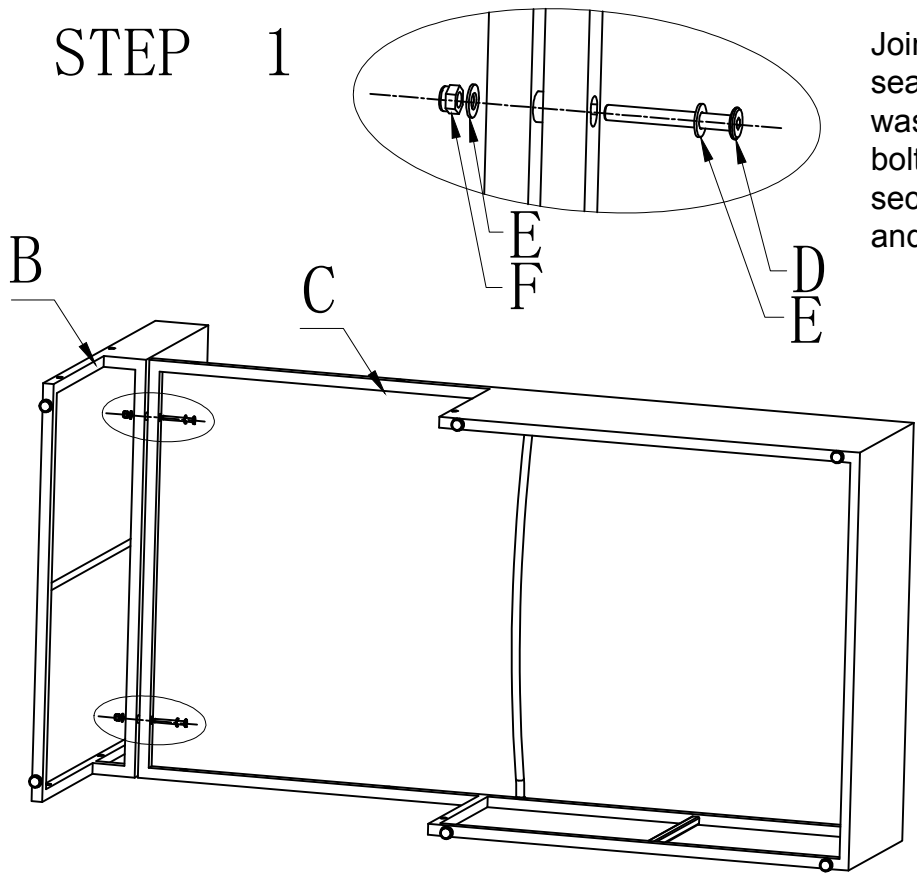

Join the back frame(B) with seat frame(C), using bolts(D), washer(E) and nut(F). Once all bolts are in position tighten securely using the Allen key and spanner.


STEP 2

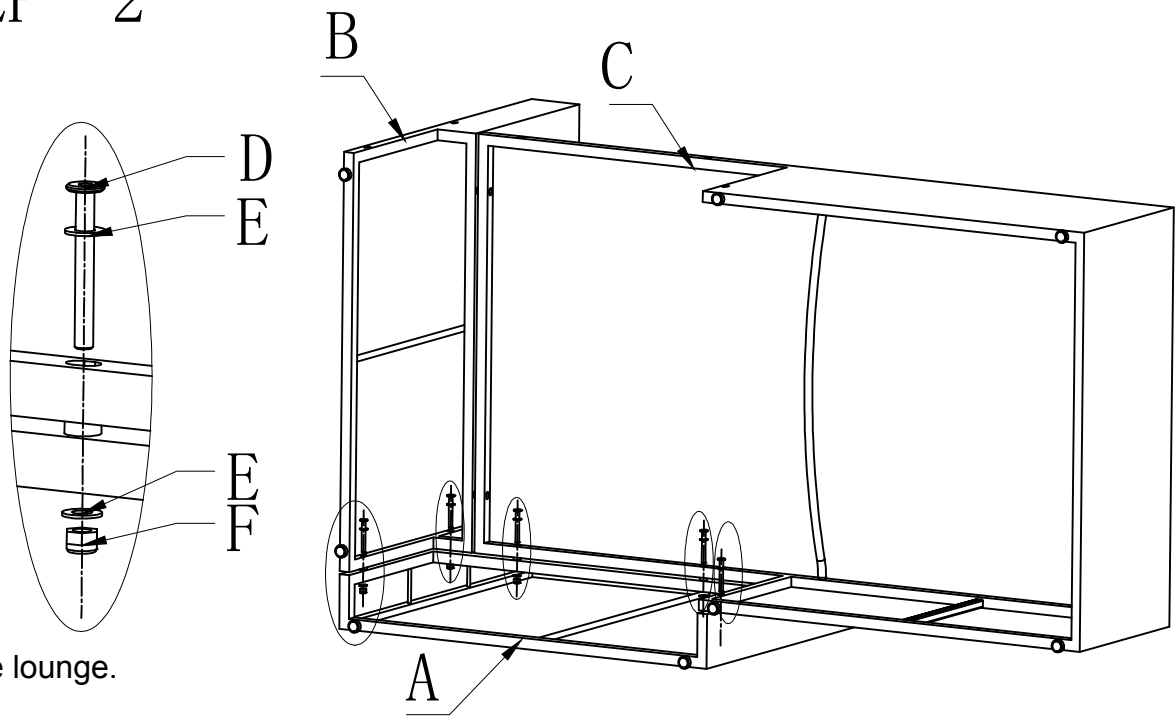


Determine which side of the setting you would like the chaise lounge (left or right - refer images on the last page of the assembly instructions). Assemble the armrest to this preferred side. Secure the armrest frame(A) with seat/back frame(B&C) using bolts(D), washer(E) and nut(F). Once all bolts are in position tighten securely using the Allen key and spanner.

STEP 3

Place the backrest and seat cushions on to the lounge.

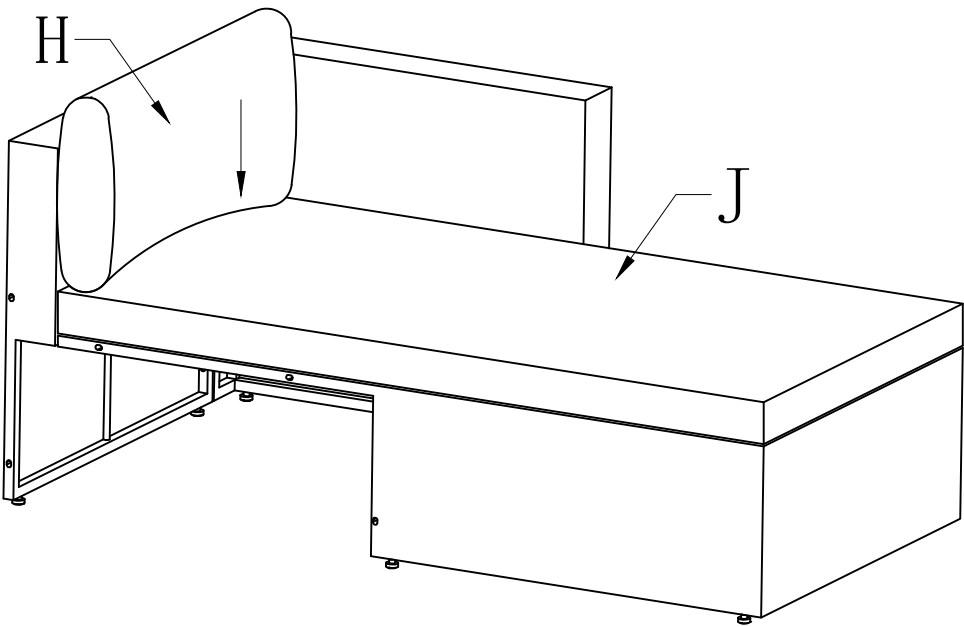


STEP 4 Your chaise lounge is now ready for joining to the 2-seater lounge.

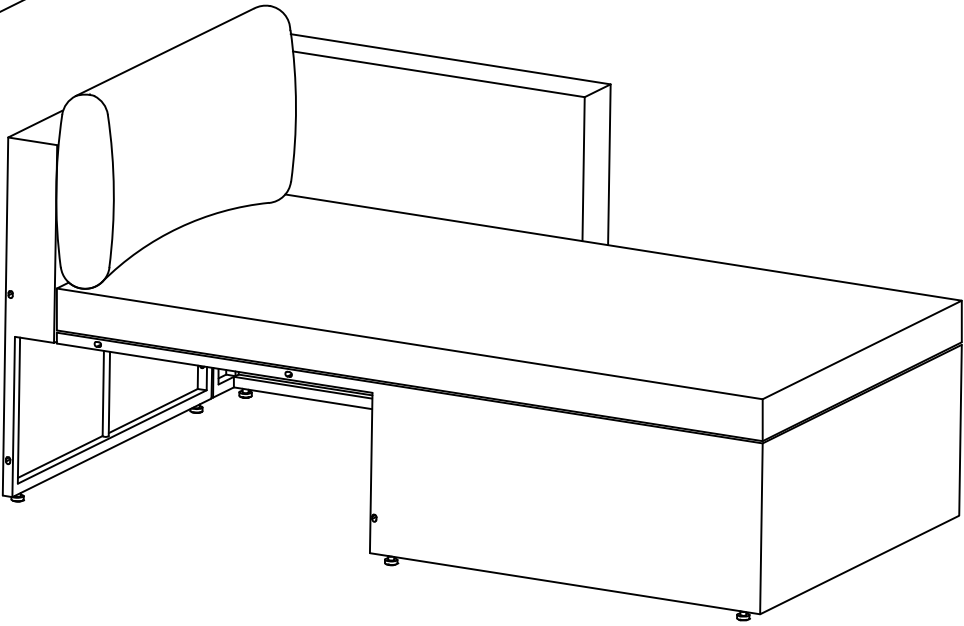


# 2-seater lounge

A	Armrest frame	1
B	Back frame	1
C	Seat frame	1
D	Bolt M6*60mm	8
E	Washer Φ 13*Φ 6.5*1.0mm	16
F	M6 nut	8
G	Back cushion	2
H	Seat cushion	1



## STEP 1

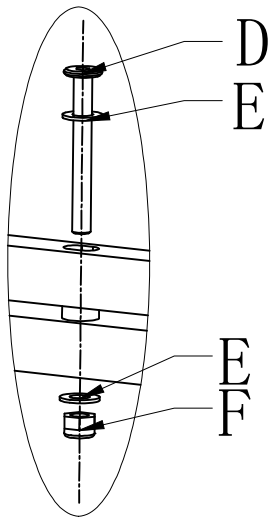

Join the back frame(B) with seat frame(C), using bolts(D), washer(E) and nut(F). Once all bolts are in position tighten securely using the Allen key and spanner .

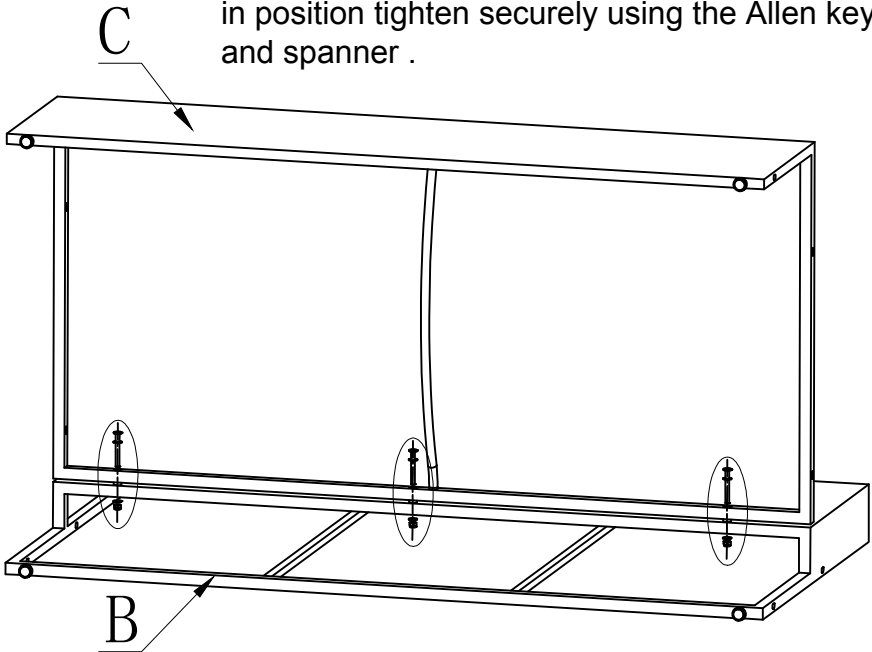


## STEP 2

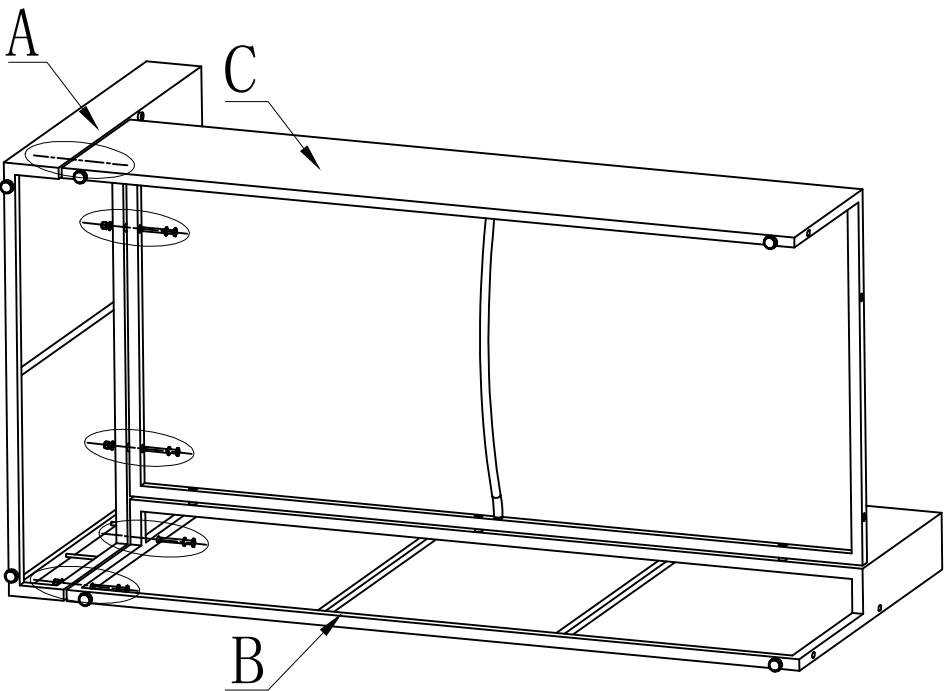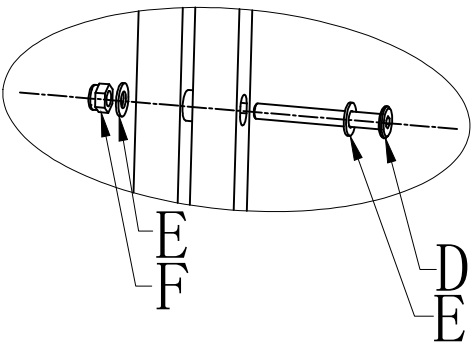







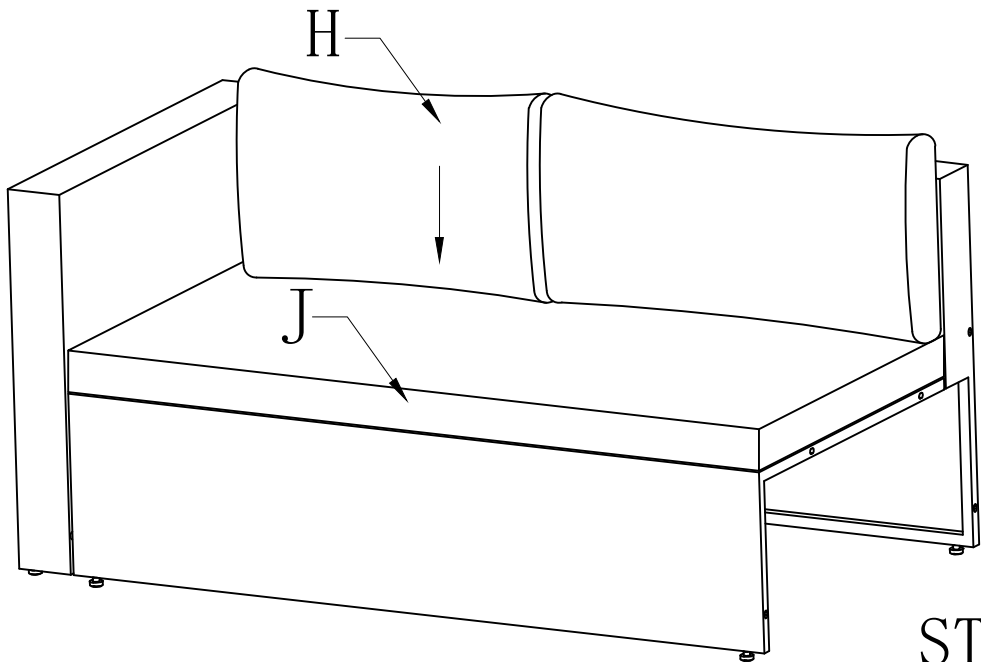

Secure the armrest frame(A) with seat/back frame(B&C) using bolts(D), washer(E) and nut(F). Make sure you assemble the armrest on the opposite side to where the chaise lounge will join. Once all bolts are in position tighten securely using the Allen key and spanner.

## STEP 3 Place the backrest and seat cushions on to the lounge.

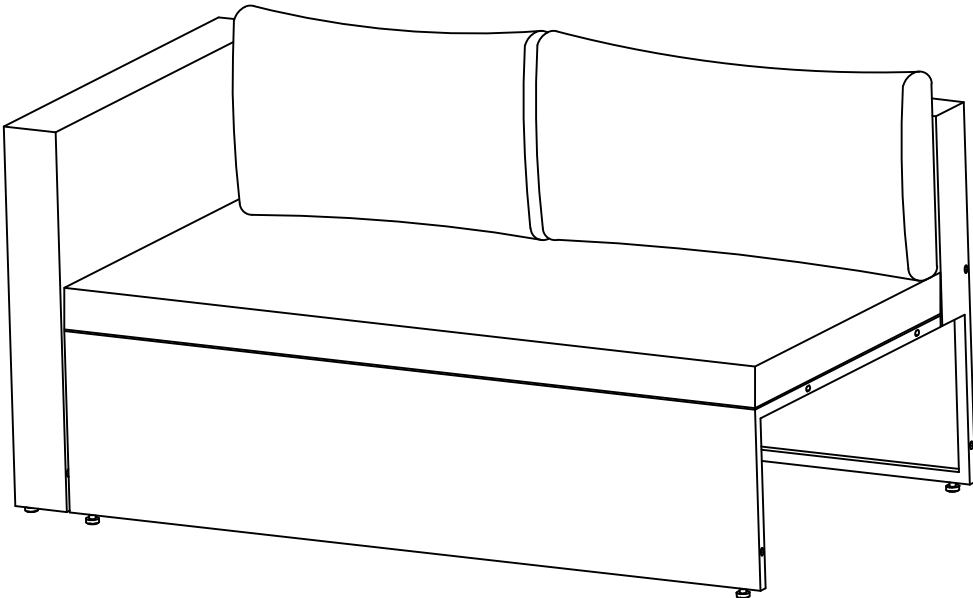


## STEP 4 Your lounge is now ready to join to the chaise lounge.



A	 2-seater lounge	1
B	 Chaise lounge	1
C	 Bolt M6*60mm	5
D	 Washer Φ 13*Φ 6.5*1.0mm	10
E	 M6 nut	5
F	 Allen key	1
G	 Spanner	1


STEP 1

Join the chaise lounge with the 2-seater lounge, using bolts(D), washer(E) and nut(F). Once all bolts are in position tighten securely using the Allen key(F) and spanner (G).

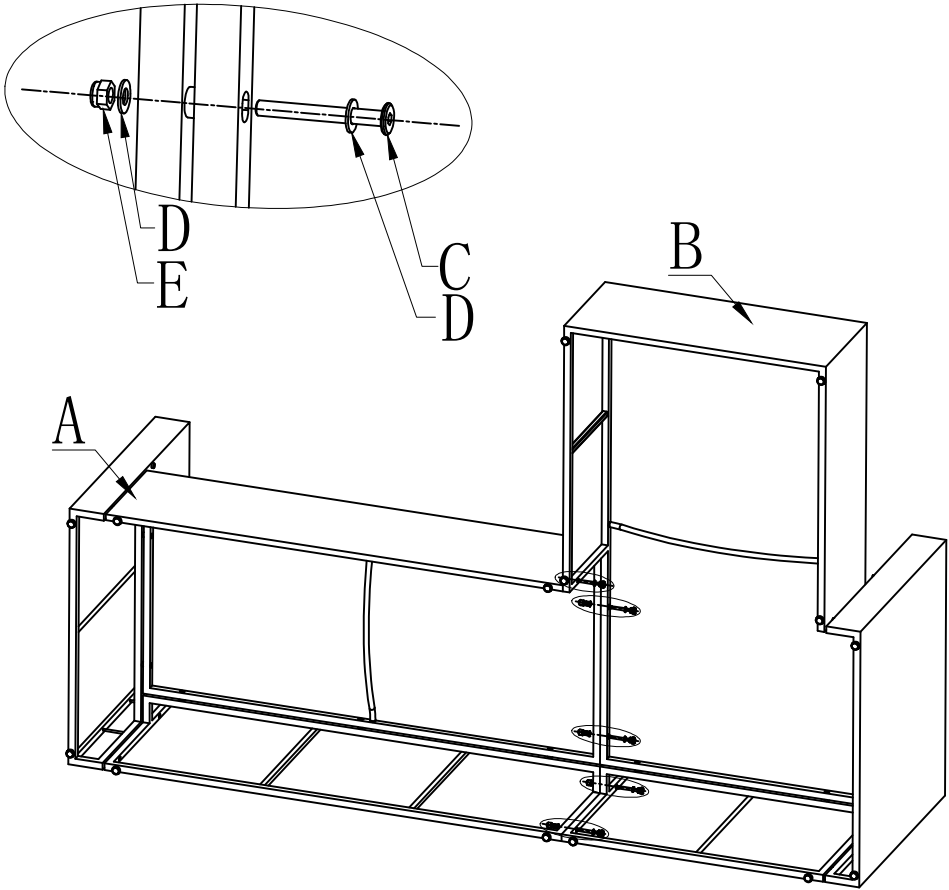

STEP 2

Your lounge setting is now ready for use.

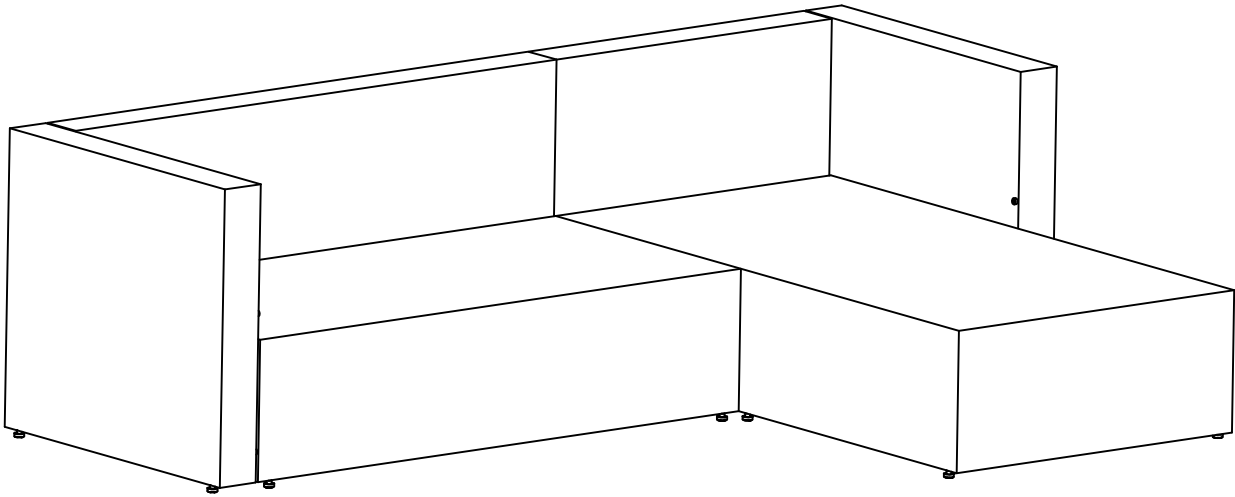

Depending on the area that you want to use your lounge in, the chaise lounge can be configured on the left or right side.

