

NEW SIZES NEW BLINDS

VELUX®

World-leading skylights and roof windows

Product information and price list (RRP incl. GST)

1st April 2020



STREAMLINED
EXTERIOR




OUTSTANDING LIGHT
TRANSMITTANCE



WHITE
INTERIOR FINISH



VELUX
ACTIVE

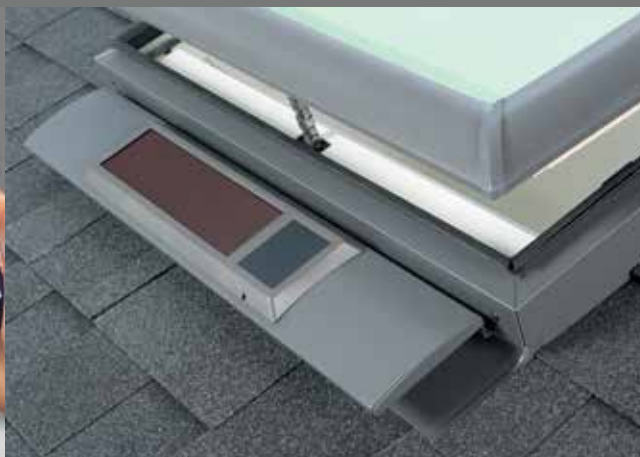

SOLAR-POWERED
SKYLIGHTS



CHOICE OF
BLINDS



Throughout the construction industry, VELUX is a by-word for quality, a reputation that has been painstakingly built up for more than 30 years in New Zealand and for over 75 years around the world.

Perfectly designed to withstand the world's harshest climatic conditions, all VELUX products are of the highest quality and will perform superbly for a lifetime of faultless service.

Take a look through this guide and judge for yourself. For range, quality, value, guarantees, delivery and service – VELUX is a world leader.




968 (2017)
969 (2017)
970 (2017)

Every single VELUX skylight, roof window and sun tunnel has been appraised by BRANZ (up to 60°). The VELUX products ticked all the boxes... safety glazing, durability, weathertightness, energy efficiency and more!



ALL VELUX Skylights supplied with Laminated double glazing as standard

High Performance double glazing Standard across entire skylight range

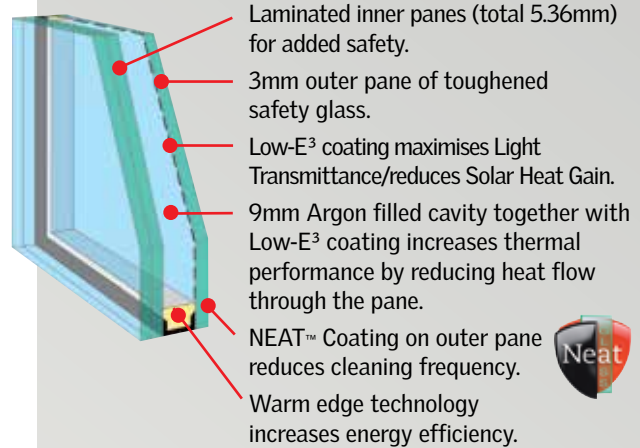

New Zealand Standard 4223.4

Laminated glass (standard) must be used for skylights installed 5m or more above floor level.

Benefits:

- UV Harmful rays block **approx 99%**
- Noise reduction factor **32 decibels**
- WERS rating **5 stars**
- Double layer of Low-E³ coating.

NEAT™ Photocatalytic Coating

- Silicone Dioxide/Titanium Dioxide coating reacts with the sun's UV rays to decompose surface organic dirt before rinsing away with the next shower of rain, thereby reducing cleaning frequency.
- The coating also makes the glass surface smoother, so water disperses evenly, sheets off and evaporates quickly; thereby minimising water spotting on the pane.

Smart indoor climate control

A healthier indoor climate.
Automatically!

VELUX ACTIVE

Smart sensor based operation of your VELUX skylights and blinds.

with
NETATMO



See page 5.

VELUX ACTIVE with NETATMO requires an iPhone or iPad, with iOS 9.0 or later. Android: Requires Android 5.0 and higher with access to Google Play.

Pitched roof Skylights


VSS Solar-powered



VS Manually operated



FS Fixed (non-opening)

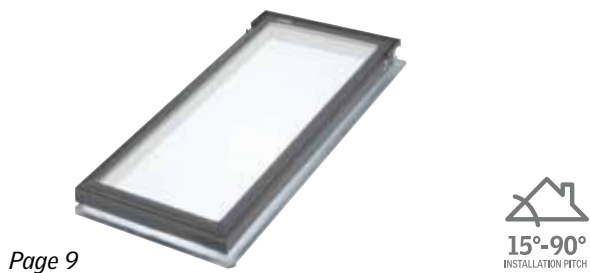


Flat/low-pitched Skylights


VCS Solar-powered



VCM Manually operated

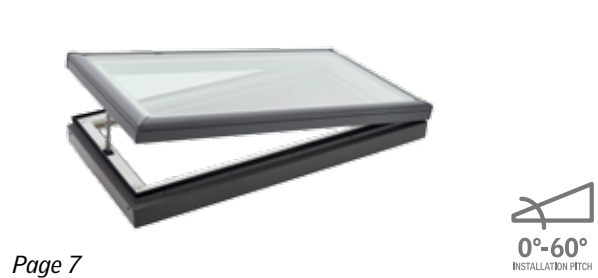

FCM Fixed (non-opening)

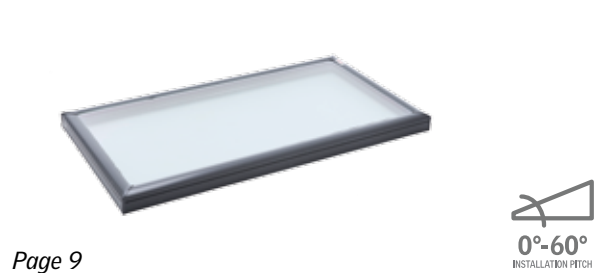

Sun Tunnels and Roof Windows

TWF Flexible



TWR Rigid





TCR For flat roofs



GGU

White
polyurethane
finish

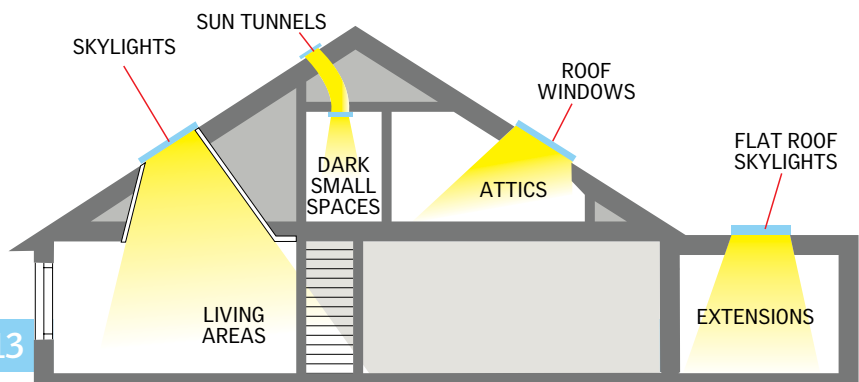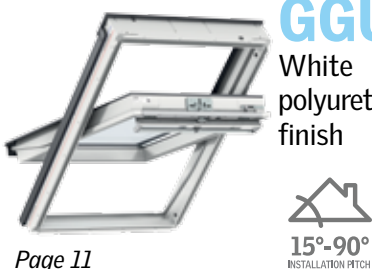

Automatic sensor-based ventilation*

Solar-powered Skylight

- Solar panel mounted below the skylight provides all the power needed to operate the skylight.
- Rain sensor automatically closes skylight with on-set of rain.
- Battery power negates power surges and blackouts.
- Easy to install, no need for electrical wiring.

***Requires VELUX ACTIVE**
– sold separately (Page 5)

Pitched roofs




15°-90°
INSTALLATION PITCH*

VSS

Solar-powered


The ultimate skylight that provides abundant daylight and controllable ventilation. Features a solar panel that captures available daylight to recharge a highly efficient, concealed battery-powered operator and control system.

- Wireless installation. No electrician required.
- White painted interior timber frame and sash.
- Outer aluminium cappings (grey).
- Smooth profile sits lower in the roof, does not obstruct the roofline.
- Available in 7 sizes.
- Wall-mounted keypad.
- Rain sensor automatically closes the skylight when rain is detected.
- High Performance double glazing with NEAT™ outer coating: reduces cleaning frequency.
- Includes removable insect screen.
- Flashings to be ordered separately.

Technical Performance (complete skylight)	
R-value†	0.50
Solar Heat Gain Co-efficient†	0.23
Hailstone Test±	
VELUX Simulated Tests	ASTM E822-2009
WERS max 5 stars (summer rating)	
★★★★★	
NZ Standards	
NZS4223.4	AS4285
NZS3604	NZS1170



Flat/low-pitched roofs

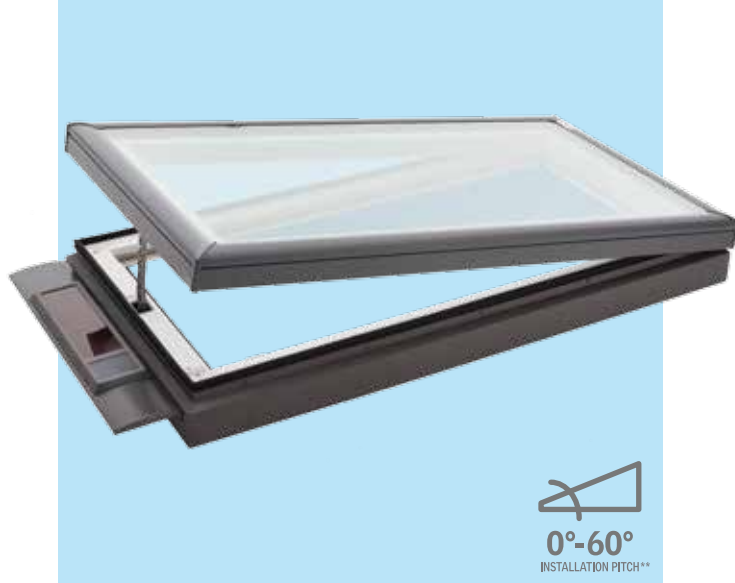


0°-60°
INSTALLATION PITCH**

VCS

Solar-powered


The ultimate flat roof skylight that provides abundant daylight and controllable ventilation. Features a solar panel that captures available daylight to recharge a highly efficient, concealed battery-powered operator and control system.

- Wireless installation. No electrician required.
- Maintenance Free – White PVC interior frame for a tough, hard wearing interior finish.
- Outer aluminium cappings (grey).
- Available in 6 sizes.
- Wall-mounted keypad.
- Rain sensor automatically closes the skylight when rain is detected.
- High Performance double glazing with NEAT™ outercoating: reduces cleaning frequency.
- Includes removable insect screen.
- Requires custom-made flashing (not supplied by VELUX).

Technical Performance (complete skylight)	
R-value†	0.40
Solar Heat Gain Co-efficient†	0.24
Hailstone Test±	
VELUX Simulated Tests	ASTM E822-2009
WERS max 5 stars (summer rating)	
★★★★★	
NZ Standards	
NZS4223.4	AS4285#
NZS3604	NZS1170



See installation preparation guide on back cover.

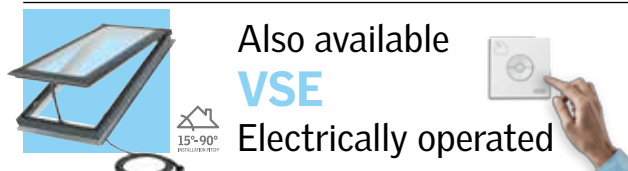

Also available
VSE
Electrically operated

VELUX ACTIVE indoor climate control (sold separately)

- **Sensor-based ventilation:** Smart sensors continuously monitor temperature, humidity and CO₂ levels and open or close your skylights accordingly.
- **Stay in control:** Use the app to operate your skylights and blinds using your smartphone.



- Choice of 7 sizes.
- 2 metre lead (supplied) plugs into power point.
- White painted interior timber frame and sash.
- Insect screen, rain sensor and wall-mounted keypad included.
- Flashings to be ordered separately.

Blinds for VSS/VCS/VSE

Solar-Powered Honeycomb – FSCH (for VSS/E)

Solar-Powered Blackout – DSH (for VSS/E)

Solar-Powered Honeycomb – FSCH (for VCS)

- All blinds are available in white.
- Sold separately.
- Easy to fit using the VELUX **Pick&Click!** System.




NEW

* For roofs below 15° pitch, VSS/E skylights need to be raised to 15° and custom flashed. VELUX can assist with technical advice and drawings.

** The VCS is watertight for pitches between 0-60°, though raising the installation pitch to 10° may be preferred for the best aesthetic appearance. Below this pitch you are likely to experience water ponding on the glass.

Cyclone test not performed with screws provided, installation requires #8 roofing screws.


† R-value (m² K/W) and SHGC data based on NFRC simulations at 90° installation pitch (VSS/VSE/VCS nominal skylight size 1200mm x 1200mm).

± Hailstone test not conducted on solar panel. Solar panel not attached during test. NB: Contact VELUX when installing VSS above/below combination  due to positioning of solar panel.



Healthy daylight, fresh air
and sky views

Pitched roofs

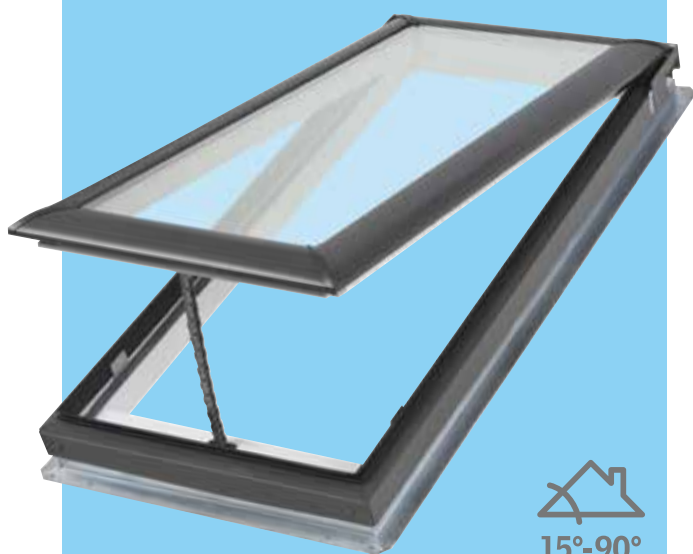

Flat/low-pitched roofs



VS

Manually operated

Provides the comfort and energy savings of free daylight and natural ventilation.

- White painted interior timber frame and sash.
- Outer aluminium cappings (grey).
- Operated by winder handle for within-reach situations or by rod for out-of-reach use. Sold separately.
- Smooth profile sits lower in the roof, does not obstruct the roofline.
- Available in 7 sizes.
- High Performance double glazing as standard, with NEAT™ outer coating: reduces cleaning frequency.
- Includes removable insect screen.
- Flashings to be ordered separately.

Technical Performance (complete skylight)	
R-value†	0.50
Solar Heat Gain Co-efficient†	0.23
Hailstone Test	
VELUX Simulated Tests	ASTM E822-2009
WERS max 5 stars (summer rating)	
★★★★★	
NZ Standards	
NZS4223.4	AS4285
NZS3604	NZS1170



VCM

Manually operated

Cost effective solution for natural ventilation in flat roofs.

- Maintenance free - White PVC interior frame for a tough interior finish.
- Outer aluminium cappings (grey).
- Operated by winder handle for within-reach situations or by rod for out-of-reach use. Sold separately.
- Available in 6 sizes.
- High Performance double glazing as standard, with NEAT™ outer coating: reduces cleaning frequency.
- Includes removable insect screen.
- Requires custom-made flashing (not supplied by VELUX).

Technical Performance (complete skylight)	
R-value†	0.40
Solar Heat Gain Co-efficient†	0.24
Hailstone Test	
VELUX Simulated Tests	ASTM E822-2009
WERS max 5 stars (summer rating)	
★★★★★	
NZ Standards	
NZS4223.4	AS4285#
NZS3604	NZS1170



See installation preparation guide on back cover.

Blinds for VS

Solar-Powered Honeycomb – FSCH Solar-Powered Blackout – DSH

Includes wireless, wall-mounted keypad.



- All blinds are available in white. • Sold separately.
- Easy to fit using the VELUX **Pick&Click!**® System.

Manual control options VS (Sold separately)

- Winder handle for operating within-reach.
- Telescopic rod control for out-of-reach situations. (145cm in length, extendable up to 285cm.)



ZZZ 201

ZCT 300



Blinds for VCM

Solar-Powered Honeycomb – FSCH includes wireless, wall-mounted keypad.



NEW

- All blinds are available in white. • Sold separately.
- Easy to fit using the VELUX **Pick&Click!**® System.

Manual control options VCM (Sold separately)

- Winder handle for operating within-reach.
- Telescopic rod control for out-of-reach situations. (145cm in length, extendable up to 285cm.)



ZZZ 212

ZCT 300



* For roofs below 15° pitch, VS skylights need to be raised to 15° and custom flashed. VELUX can assist with technical advice and drawings.

** The VCM is watertight for pitches between 0-60°, though raising the installation pitch to 10° may be preferred for the best aesthetic appearance. Below this pitch you are likely to experience water ponding on the glass.

† R-value (m² K/W) and SHGC data based on NFRC simulations at 90° installation pitch (VS/VCM nominal skylight size 1200mm x 1200mm).


Cyclone test not performed with screws provided, installation requires #8 roofing screws.

Outstanding daylight provision

where extra ventilation is not required



Pitched roofs

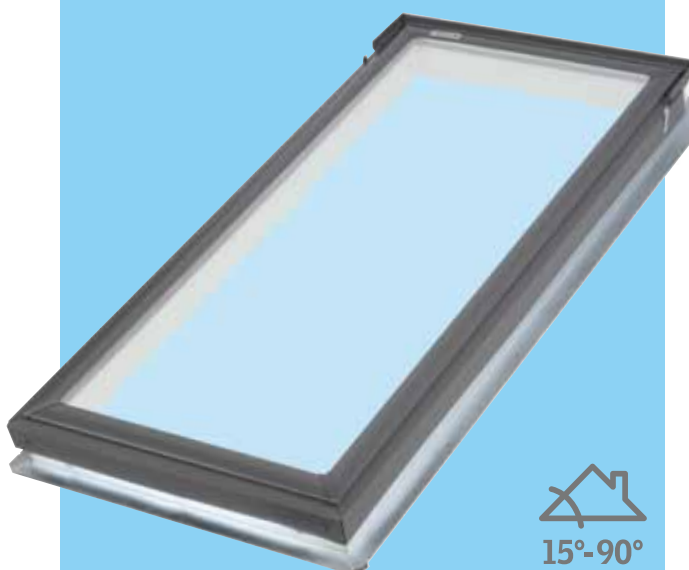

FS

Fixed (non-opening)


Cost effective for creating light-filled rooms where adequate ventilation already exists. Energy efficient glazing and the use of blinds ensures heat transference is minimised.

- White painted interior timber frame.
- Outer aluminium cappings (grey).
- Flashings to be ordered separately.
- High Performance double glazing with NEAT™ coating on outer pane: reduces cleaning frequency.
- Smooth profile sits lower in the roof, does not obstruct the roofline.
- Available in 8 sizes.

Technical Performance (complete skylight)	
R-value†	0.49
Solar Heat Gain Co-efficient†	0.26
Hailstone Test	
VELUX Simulated Tests ASTM E822-2009	
WERS max 5 stars (summer rating)	
★★★★★	
NZ Standards	
NZS4223.4 AS4285 NZS3604 NZS1170	



Flat/low-pitched roofs

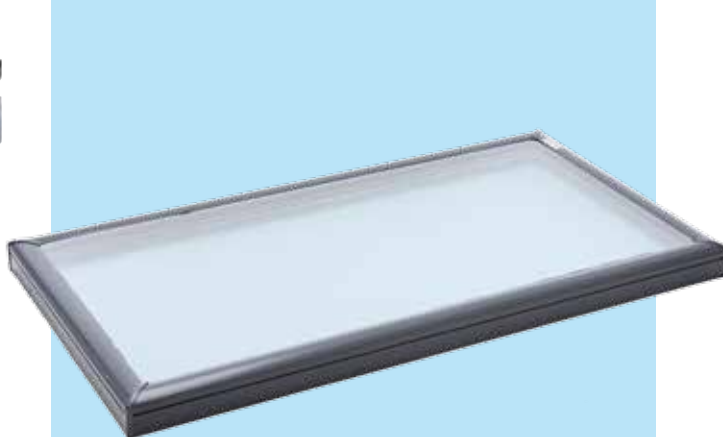

FCM

Fixed (non-opening)

The brilliantly simple FCM flat roof skylight incorporates the VELUX High Performance double glazed, laminated unit and an all-metal exterior frame.

- High performance double glazing with NEAT™ coating on outer pane: reduces cleaning frequency.
- Approx 99% UV Block.
- Available in 10 sizes.
- Maintenance-free anodized aluminium frame.
- Requires custom-made flashing (not supplied by VELUX).

Technical Performance (complete skylight)	
R-value†	0.44
Solar Heat Gain Co-efficient†	0.27
Hailstone Test	
VELUX Simulated Tests ASTM E822-2009	
WERS max 5 stars (summer rating)	
★★★★★	
NZ Standards	
NZS4223.4 AS4285 NZS3604 NZS1170	



See installation preparation guide on back cover.

Blinds for FS

Solar-powered Honeycomb – FSCD Solar-powered Blackout – DSD

Includes wireless, wall-mounted keypad.



Manual Honeycomb – FHCD

Requires ZXT 200 rod control for out-of-reach (sold separately).



- All blinds are available in white. • Sold separately.
- Easy to fit using the VELUX **Pick&Click!** System.

Blinds for FCM

Solar-Powered Honeycomb – FSCC

Includes wireless, wall-mounted keypad.
Accessory Tray ZZZ 199 required.



NEW


- All blinds are available in white. • Sold separately.
- Easy to fit using the VELUX **Pick&Click!** System.

* For roofs below 15° pitch, FS skylights need to be raised to 15° and custom flashed. VELUX can assist with technical advice and drawings.

** The FCM is watertight for pitches between 0-60°, though raising the installation pitch to 10° may be preferred for the best aesthetic appearance. Below this pitch you are likely to experience water ponding on the glass.

† R-value (m² K/W) and SHGC data based on NFRC simulations at 90° installation pitch (FS/FCM nominal skylight size 1200mm x 1200mm).

Transform wasted attic space
into fantastic loft living

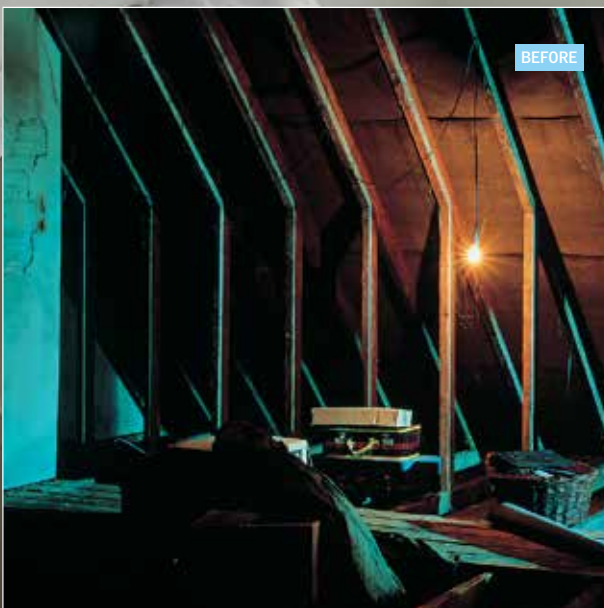

Attic Conversions



GGU

Centre-pivot roof window

Put fresh air at your fingertips with a centre-pivot VELUX Roof Window. Easy to operate. Ideal for within-reach attic situations.

- Wooden core encased in moisture-resistant white polyurethane.
- A short pull on the top control bar allows filtered background ventilation even while the window remains shut.
- A second pull on the control bar allows the window to rotate for maximum ventilation – and up to 180° for cleaning the outer pane from inside the room.
- Flashings to be ordered separately.
- Available in 7 sizes.
- Laminated double glazing as standard.
- Noise reduction 34 decibels. #

Technical Performance (complete skylight)

R-value†	0.77
Solar Heat Gain Co-efficient†	0.30

WERS max 5 stars (summer rating)

★★★★★

NZ Standards

NZS4223.4 NZS1170
NZS3604



EVERFINISH – Frame and sash are encapsulated with a thick, seamless, white polyurethane for a tough maintenance-free interior finish.



PASSIVE VENT – For controllable passive ventilation when you want it.

Blinds for GGU

Manual Blackout – DKL for complete room darkening

- All blinds are available in white. • Sold separately.
- Easy to fit using the VELUX **Pick&Click!**® System.

* For roofs below 15° pitch, roof windows need to be raised to 15° and custom flashed. VELUX can assist with technical advice and drawings.

† R-value (m² K/W) and SHGC calculated according to EN 14351-1:2006 + A2:2016 (window size 1140mm x 1180mm).

Based on RW value tested to AS1276.1.

Small dark spaces



Designed to provide natural light into corridors, stairwells, powder rooms and cupboards; where installation of a VELUX Skylight is not possible.

SUN TUNNELS

VELUX Sun Tunnels feature a range of improvements that make installation faster and easier. Tube assembly is simple so little time is spent in the roof cavity.

Rigid Sun Tunnels suit roof spaces with minimal obstructions. They have a highly reflective shaft to achieve maximum light output. Flexible Sun Tunnels can be used when obstructions prevent the use of Rigid Sun Tunnels.

Flexible Sun Tunnel (TWF OK14)

- Flexi Loc quick assembly system.
- 4mm toughened glass.
- Dual-layered ceiling diffuser.
- 1500mm long, 350mm diameter.
- Minimum distance from ceiling to roof space 0.4m.



Rigid Sun Tunnel (TWR OK14)

- Flexi Loc quick assembly system.
- 4mm toughened glass.
- Dual-layered ceiling diffuser.
- 1700mm long, 350mm diameter. Extendable to 6000mm using ZTR extensions.
- Minimum distance from ceiling to roof space 0.9m.

Low-pitch Rigid Sun Tunnel (TCR 014)

- Double-glazed diffuser, rigid tube and stylish curb-mounted module.
- 1150mm long, 350mm diameter. Extendable to 6000mm using ZTR extensions.
- Custom-made flashing required (not supplied by VELUX).





BLINDS – effective light control

Tailor-made to fit perfectly to each size of Skylight or Roof Window, VELUX Blinds are easy to install and are supplied with aluminium side channels that allow the blind to be positioned at any point down the window.

Honeycomb blinds



A stylish and modern blind providing protection from heat and glare while providing a near complete blackout from light. Manual or solar powered versions available.

- Honeycomb structured material.
- Near-total light reduction.
- Available in white only.

Blackout blinds



Provide complete room darkening. Manual or solar powered versions available.

- Blind can be stopped at any position.
- Near-total light reduction.
- Available in white only.

Pick&Click!®



The innovative VELUX **Pick&Click!®** system makes installing our blinds a snap! Installation is simple if skylight is within easy reach.

Blind options

Blind	Honeycomb Solar [^]	Blackout Solar [^]	Honeycomb Manual	Blackout Manual
VSS/E	✓	✓		
VS	✓	✓		
FS	✓	✓	✓ ^{**}	
VCM/S	✓			
FCM	✓ [*]			
GGU				✓

[^] Solar powered blinds include wireless wall-mounted keypad.

^{*} Accessory Tray ZZZ 199 required to fit blinds to FCM.

^{**} Manual Blinds for Fixed Skylights require ZXT 200 rod control for out-of-reach situations. VELUX recommends solar blinds for out-of-reach situations.



NB: New VELUX blinds do not fit VELUX Skylights manufactured prior to March 2010/VELUX Roof Windows manufactured prior to March 2014 – contact VELUX for details to fit older models. Blinds not available for FCM 2270 or FCM 1430.

NB: VELUX recommends retracting blinds during windy conditions if skylight is open.

Clever design

The unique VELUX top flashing allows for a lower installed height. The top flashing element is a one-piece section that overlaps the top of, and diverts water around, the skylight or roof window.

Flashings are available for skylights and roof windows when installed in roofs from 15° - 90°.

Low-pitch skylights require custom made flashings (not supplied by VELUX).



Precision-made Flashings

Safe, effective rainwater drainage

The unique construction of VELUX flashings ensures safe drainage of rainwater coming from the roof above the window. Because the roofing material covers both top and sides, VELUX flashings are largely unobtrusive. To harmonise even further with the roofing material, they are available in standard grey aluminium.

EDW flashing – for metal or tile roofing. e.g. corrugate, tile

- Flashing for single skylight or roof window.
- Designed for roof pitches from 15° to 90°.
For roofs below 15° create pitch-up and use custom made flashing (not supplied by VELUX).

EDL flashing – for flat profile roofing material. e.g. shingle, slate

- Flashing for single skylight or roof window.
- Designed for roof pitches from 15° to 90°.
For roofs below 15° create pitch-up and use custom made flashing (not supplied by VELUX).

EKW combi flashing – for metal or tile roofing. e.g. corrugate, tile

- Flashing for combination of multiple skylights or roof windows.
- Can be used to combine units vertically or horizontally.
- Designed for roof pitches from 15° to 90°


Contact VELUX when installing VSS above/below combination due to positioning of solar panel.

Opening Skylights (pitched roofs)



15°-90°

Overall frame dimension w x h mm ▶

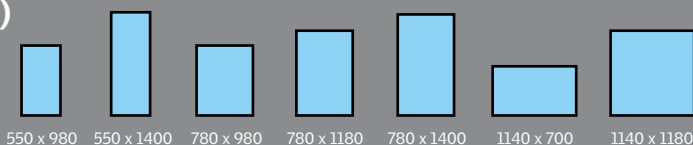

High Performance Double Glazing	Size code ▶	C04	C08	M04	M06	M08	S01	S06
VSS Solar-powered skylight*	(RRP) \$	2,040	2,090	2,110	2,170	2,230	2,150	2,280
VSE Electrically operated skylight*	(RRP) \$	1,820	1,900	1,920	1,990	2,030	1,950	2,070
VS Manual opening skylight†	(RRP) \$	920	990	1,000	1,060	1,110	1,030	1,150

† Operating Rod (ZCT 300) for out-of-reach operation and winder handle (ZZZ 201 for within-reach operation in place of hook) to be purchased separately.

* Includes insect screen, pre-installed motor, wall-mounted keypad and rain sensor, solar panel included with VSS.

Blinds (VSS, VSE, VS)	Size code ▶	C04	C08	M04	M06	M08	S01	S06
FSCH Solar Honeycomb blind^, white only	(RRP) \$	570	590	590	610	630	610	650
DSH Solar Blackout blind^, white only	(RRP) \$							


^ Wireless wall-mounted keypad supplied

Fixed Skylights (pitched roofs)



15°-90°

Overall frame dimension w x h mm ▶

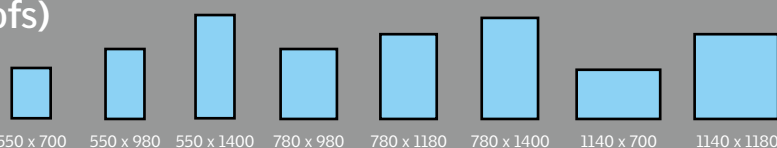

High Performance Double Glazing	Size code ▶	C01	C04	C08	M04	M06	M08	S01	S06
FS Fixed skylight	(RRP) \$	470	530	590	600	650	710	630	750

Blinds (FS)	Size code ▶	C01	C04	C08	M04	M06	M08	S01	S06
FHCD Manual Honeycomb blind**, white only	(RRP) \$	240	250	270	270	280	290	280	320
FSCD Solar Honeycomb blind^, white only	(RRP) \$	560	570	590	590	610	630	610	650
DSD Solar Blackout blind^, white only	(RRP) \$								

^ Wireless wall-mounted keypad supplied ** Requires ZXT 200 control rod for out-of-reach situations (sold separately).

Flashings (VSS, VSE, VS, FS)

	Size code ▶	C01	C04	C08	M04	M06	M08	S01	S06
EDW Flashing Kits For metal or tile roofing material up to 120mm profile height. e.g. corrugate, tile.	(RRP) \$	140	160	160	170	180	190	200	210
EDL Flashing Kits For flat profile roofing material up to 8mm thick (5mm thick when used with FS skylights). e.g. shingle, slate.	(RRP) \$	140	140	140	160	160	160	190	190

Note: To group skylights vertically or horizontally and achieve larger sizes use VELUX combi flashings – contact VELUX for details and prices.
For roofs below 15° pitch, skylights need to be raised to 15° and custom flashed (not supplied by VELUX).

NEW VELUX blinds and flashings do not fit VELUX Skylights manufactured prior to March 2010 and must be ordered accordingly.

Sun Tunnels

Tunnel diameter 350mm



Pitched roofs

TWF OK14	15°-60°	Sun Tunnel with flexible shaft – 1500mm long, 350mm diameter	(RRP) \$	490
TWR OK14		Sun Tunnel with rigid shaft – 1700mm long, 350mm diameter	(RRP) \$	690
ZTR OK14		Rigid extension – 1180mm long (TWR only)	(RRP) \$	270

Low-pitch/flat roofs

TCR 014	0°-60°	Sun Tunnel with rigid shaft – 1150mm long, 350mm diameter	(RRP) \$	790
ZTR OK14		Rigid extension – 1180mm long	(RRP) \$	270

Sun Tunnel packages complete with integrated flashing for tiled or corrugated iron roofs, tunnel and ceiling diffuser (white). (TCR requires custom-made flashing, not supplied by VELUX).

Skylights (flat/low-pitched roofs)



0°-60°

See back cover for additional dimensions data.

External frame dimension w x h mm

NEW



488 x 895



692 x 692

NEW



692 x 895



692 x 997



692 x 1302



692 x 1911



895 x 895



895 x 1302



997 x 997



1302 x 1302

High Performance Double Glazing Size code ► 1430 2222 2230 2234 2246 2270 3030 3046 3434 4646

VCS Solar-powered skylight*, white PVC (RRP) \$ - 2,110 - 2,170 2,220 - 2,200 2,340 - 2,440

VCM Manual opening skylight†, white PVC (RRP) \$ - 1,130 - 1,210 1,260 - 1,240 1,390 - 1,490

FCM Fixed skylight (RRP) \$ 440 450 480 510 560 840 540 670 560 760

Custom-made flashing by Roofer required (not supplied by VELUX). See curb build diagram on back cover.

† Operating Rod (ZCT 300) for out-of-reach operation and winder handle (ZZZ 212 for within-reach operation in place of hook) to be purchased separately.

* Includes insect screen, pre-installed motor, wall-mounted keypad, rain sensor and solar panel.

Blinds (VCS, VCM, FCM) Size code ► 1430†† 2222 2230 2234 2246 2270†† 3030 3046 3434 4646

FSCC Solar Honeycomb blind, white only (RRP) \$ - 570 580 590 600 - 590 640 600 690
Accessory Tray ZZZ 199 required for FCM
Wireless wall-mounted keypad supplied.

ZZZ 199 Accessory tray for FCM (RRP) \$ - 150 160 160 160 - 170 180 180 190
Required to fit FSCC blinds onto FCM low-pitch skylights only.

†† Blinds not available for FCM 1430 & FCM 2270.

Opening Roof Window

Recommended for within-reach situations only



15°-90°

Overall frame dimension w x h mm



550 x 780



550 x 980



780 x 980



780 x 1180



780 x 1400



1140 x 1180



1140 x 1400

Laminated Double Glazing Size code ► CK02 CK04 MK04 MK06 MK08 SK06 SK08

GGU Roof Window, white polyurethane (RRP) \$ 720 780 870 960 1,010 1,220 1,390

Flashings (GGU) Size code ► CK02 CK04 MK04 MK06 MK08 SK06 SK08

EDW Flashing Kits (RRP) \$ 150 160 170 180 190 210 220
For metal or tile roofing material up to 120mm profile height e.g. corrugate, tile.

EDL Flashing Kits (RRP) \$ 140 150 160 170 170 190 200
For flat profile roofing material up to 8mm thick e.g. shingle, slate.

Blinds (GGU) Size code ► CK02 CK04 MK04 MK06 MK08 SK06 SK08

DKL Manual Blackout blind, white only (RRP) \$ 120 130 150 170 190 210 230

NEW VELUX blinds and flashings do not fit VELUX Roof Windows purchased prior to March 2014 and must be ordered accordingly.

Electric and Rod Controls

ZZZ 212 Winder handle (white) to operate VCM low-pitch opening skylights within reach (RRP) \$ 50

ZZZ 201 Winder handle (white) to operate VS opening skylights within reach (RRP) \$ 50

ZXT 200 Extendable rod control to operate FHCD manual fixed skylight blinds. 100cm – 180cm length (RRP) \$ 60

ZCT 300 Extendable rod control to operate VS/VCM manual opening skylights. 145cm – 285cm length (RRP) \$ 70

KIX 300 VELUX ACTIVE starter kit – includes 1 x internet gateway, 1 x climate sensor, 1 x departure switch (RRP) \$ 495

KLA 300 VELUX ACTIVE indoor climate sensor (RRP) \$ 190
Additional climate sensors required to extend your VELUX ACTIVE system to additional rooms


KLF 200 Interface Unit. Connect to third party building managements systems, sensors and switches. (RRP) \$ 495
Individual control of 5 products (or groups), up to 200 products in total
Pairs wirelessly with electric skylights and blinds and is wired to the home automation system

Framing and trim-out guides

Complete installation instructions are supplied with each product and available for download on www.velux.co.nz


Pitched roof skylights VSS, VSE, VS, FS

(with VELUX Proprietary Flashing EDW, EDL, EKW)

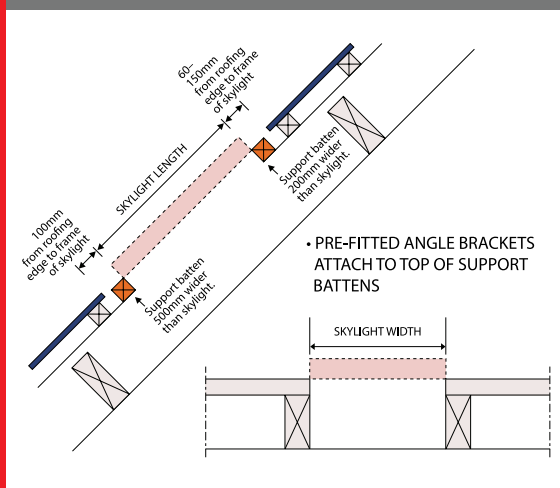

Flat/low-pitched roof skylights VCS, VCM, FCM


Custom-made flashing by Roofer required (not supplied by VELUX)

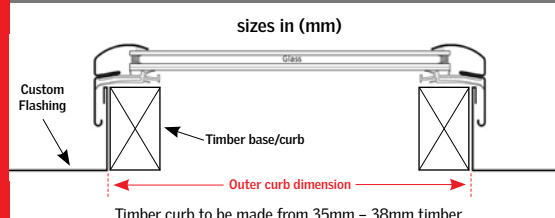

Size	Outer Curb dimensions	Skylight Width overall
1430	445 x 850	488 x 895
2222	645 x 645	692 x 692
2230	645 x 850	692 x 895
2234	645 x 950	692 x 997
2246	645 x 1255	692 x 1302
2270	645 x 1865	692 x 1911
3030	850 x 850	895 x 895
3046	850 x 1255	895 x 1302
3434	950 x 950	997 x 997
4646	1255 x 1255	1302 x 1302


Roof windows (GGU)

(with VELUX Proprietary Flashing EDW, EDL, EKW)

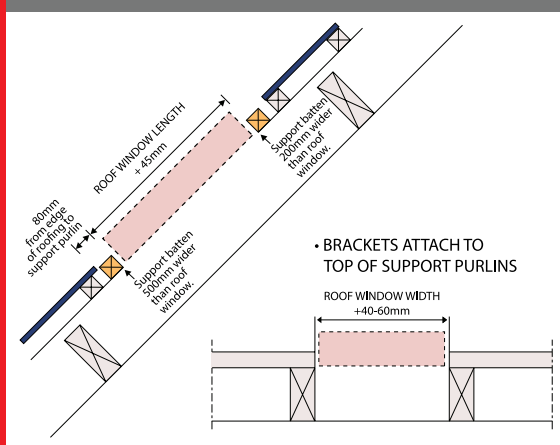

Bringing light to life

AUCKLAND HEAD OFFICE & SHOWROOM

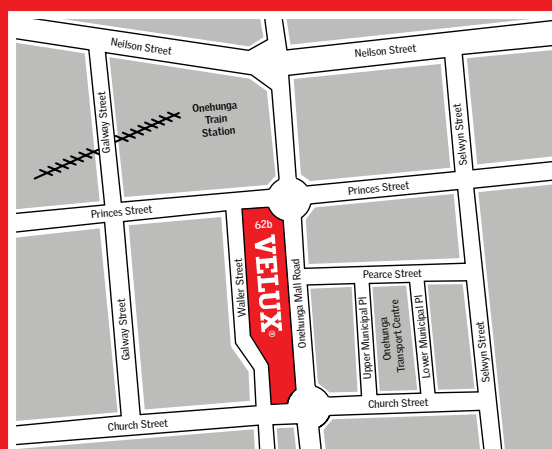

OPENING TIMES:
Auckland Head Office: 8am - 4.30pm (Mon-Fri)
Showroom: 8.30am - 4pm (Mon-Fri)

VELUX New Zealand Ltd
62b Princes Street, Onehunga 1061
PO Box 12632, Penrose, Auckland 1642

Customer Services: Tel: 0800 650 445
E-mail: info@velux.co.nz

www.velux.co.nz

VELUX®

The utmost care has been taken to provide accurate information. However, VELUX shall not be held responsible for any consequences arising from any errors or omissions in the catalogue nor for any damage or accidental loss resulting from the use of the information herein. VELUX reserves the right to modify, through development improvements, the products displayed in this brochure without notification.
©2017 VELUX GROUP, VELUX®, VELUX logo are registered trademarks. V-NZ 0420