

PEAK® 3-Step Stair Stringers




Simple 1-2-3 Installation

⚠ CAUTION Before beginning work, read and follow DETAILED instructions from below or from www.peakproducts.com.au. Building codes may vary. Always understand and comply with your local building codes.

Important Information

WOOD TYPE	STEP TREAD	FOR STAIR WIDTHS	QTY. STRINGERS REQUIRED	STRINGER SPACING	TREAD END OVERHANG
Pine	240 mm x 45 mm	Up to 1200 mm	Min. 2	Max. 950 mm	Min. 50 mm Max. 125 mm
		More than 1200 mm	Min. 3	Max. 600 mm	
Spotted gum Kwila (Merbeau) Ironbark	240 mm x 43-45 mm	Up to 1200 mm	Min. 2	Max. 1200 mm	
		More than 1200 mm	Min. 3	Max. 600 mm	

Step treads must have a slip-resistant finish, or a non-skid strip or treatment near the edge of the nosing.

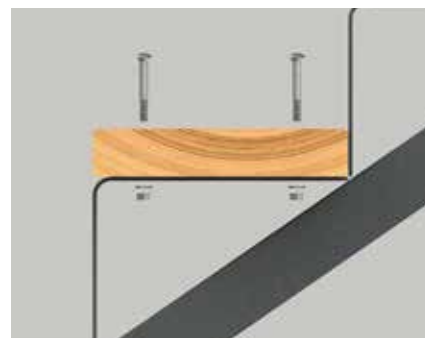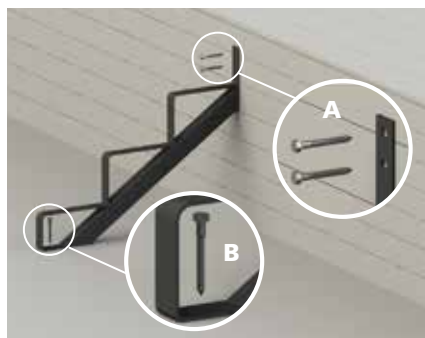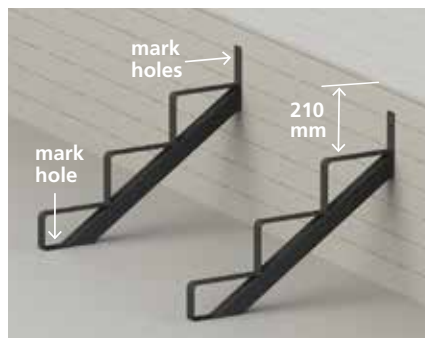

1 Determine the location of all stringers and ensure the top tread support is 210 mm down from upper deck surface. Then, for each stringer, mark the two fastener locations on the deck rim, and one fastener location on the lower deck surface.

2 A: Attach bottom of each stringer using M10 coach screws* for timber, or M10 x 60 mm min. concrete anchors for concrete (not provided).

B: Attach top of each stringer using M10 coach screws*(not provided).

* Minimum embedment of threaded portion of screw must be 45 mm into innermost structural member. Material of steel coach screws shall be given in AS/NZS 4291.1, for property classes 4.6 and 4.8.

3 Install each timber tread using M8 x 60 mm cup head bolts, nuts and washers (not provided).

⚠ WARNING No representation or warranty is given that your particular application of these products complies with relevant building codes or that the fasteners used are appropriate for your application. Consult with professionals and local building officials before beginning work: (i) to ensure compliance with relevant building codes for your application and for your proposed use of fasteners; (ii) to ensure the integrity of the structural components in connection with which these products are to be used; (iii) to identify appropriate safety gear that is to be used during installation such as a safety harness when working above ground; (iv) to ensure that the work area is free from utilities, services and hazards; and (v) to clarify any instructions or warnings that may not be clear. Work in a safe manner wearing protective gear such as gloves, eyewear, headwear, footwear and clothing. When using tools comply with operation manuals and instructions. Installation materials may have sharp edges and could fragment or splinter during or as a result of handling or cutting. Do not use these products in connection with any substance that is or may be harmful or corrosive to the products. Inspect and maintain these products and the structural components that they are used in connection with on a regular basis, using professionals when appropriate.

Peak Products Corporation shall not be liable for any loss or damage resulting from the improper installation or improper use of this product, subject to any contrary provision of the Australian Consumer Law in Australia.

Peak products and associated materials are protected by patents, designs, copyrights and/or trademarks used under license from Peak Innovations Inc..



Made in China for:
Peak Products Corporation
Suite 100, One Financial Place,
Lower Collymore Rock,
St. Michael, Barbados

© 2017 Peak Products Corporation

V1

72560