

Significantly reduces gutter cleaning

OUR PRODUCT

GumLeaf Gutter Guard uses a directional 3D louvre design that allows leaves to blow off effortlessly but allows water to flow unobstructed into your gutter.

We only use Australian made BlueScope Colorbond steel. A tried and tested product that has been used successfully in Australia for over 18 years.

Full installation instructions visit www.diygutterguard.com.au

Install yourself or insist your tradesperson uses GumLeaf Gutter Protection

“Need Help?”
Call 1300 486 532

The colour chart below are the colours for GumLeaf's 4 mm Gutter Guard for corrugated/metal roofs (each colour shows the relevant Bunnings number as well). For the available colours & numbers for GumLeaf's 2mm Gutter Guard please see the Special Orders desk.

Colorbond

Monument 3041642	Basalt 3041646	Evening Haze 3041644
Cove 3041647	Gully 3041648	Mangrove 3041650
Headland 3040246	Manor Red 3040247	Jasper 3040248
Sandbank 3040249	Classic Cream 3040250	Surfmist 3040251
Paper Bark 3040252	Dune 3040253	Shale Grey 3040254
Windspray 3040255	Woodland Grey 3040245	Bushland 3040256
Pale Eucalypt 3040257	Wilderness 3040258	Cottage Green 3040260
Plantation 3040261	Blue Ridge 3040262	Deep Ocean 3040263
Ironstone 3040264	Night Sky 3040265	For Tile roofs: 70 Fold 3040266 80 Fold 3040268 90 Fold 3040244 100 Fold 3040269
Galvanised 3041654	Zinc Coated 3041652	
Wallaby 3041651	Terrain 3041649	

Water Harvesting

There is really no point in having a water tank if your gutters do not freely supply the water! Or even clean water for that matter. If you install GumLeaf Gutter Protection, your water will have a clear run to the down pipe. Your tank will fill approximately 3 times faster with cleaner water!



BAL Index Ratings

The new building standard assessment has six levels of risk based on a bushfire's attack level (BAL). Requirements range from ember protection at a low level (BAL = 12.5) to fire rated construction at the highest level (BAL = FZ = Flame Zone). GumLeaf 2mm conforms to all levels.

GumLeaf 2mm Gutter Guard BAL

BAL Rating	Conforms
BAL - Low	✓
BAL - 12.5	✓
BAL - 19	✓
BAL - 29	✓
BAL - 40	✓
BAL - FZ	✓

Council Approvals

GumLeaf has a CSIRO fire rating of "0", the best rating possible. When building a home in a bushfire area, GumLeaf is the best protection your home can have.

FEATURES & BENEFITS

- ◆ CSIRO fire rating of "0", the best possible (AS1530.2-1993)
- ◆ Australian made BlueScope Colorbond steel
- ◆ Eliminates blocked gutters and downpipes
- ◆ Improves water collection and water quality for water tanks
- ◆ Eliminates birds nesting and vermin entry into ceiling
- ◆ Reduces flood damage to your roof and house
- ◆ Reduces bush fire hazards
- ◆ Custom folded to go under 1st tile
- ◆ Machine scalloped for corrugated roofs, thus requires no trim or saddles
- ◆ A proven product that has been used extensively for over 18 years
- ◆ Any Colorbond colour (use chart attached)
- ◆ Available for DIY home owners. GumLeaf ships anywhere in Australia
- ◆ Installation available in most areas
- ◆ As seen on Better Homes & Gardens
- ◆ 25 year functional warranty

Will Reduce Gutter Cleaning Dramatically




Helps With Bush Fire Prevention

On an extremely serious note, having your gutters full of tinder, dry leaves and debris can be disastrous in bushfire season. Bushfires in Australia are all too common every year. Ember attack can happen from 5 kms away. If you need to evacuate, prevention is vital. GumLeaf Gutter Protection prevents your gutters from being full of dry leaves and debris.

Pretty birds not so pretty anymore?



Keep birds "out" of your roof by eliminating their access. Many birds nest in roofs and gutters. While it's nice to have birds chirping in the trees, it is devastating to have them bring bird lice into your home and also the disturbing sleep they can cause.

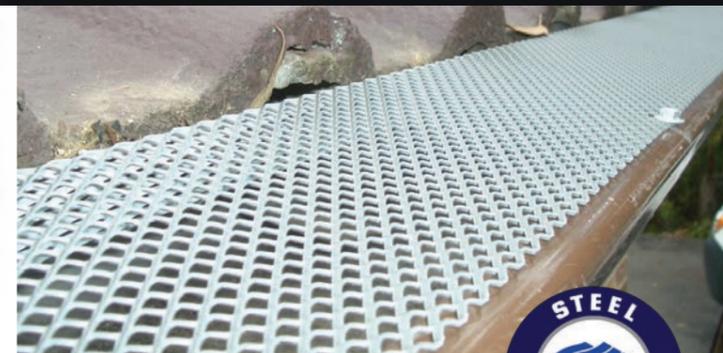

D.I.Y. Gutter Guard

www.diygutterguard.com.au

Available at
BUNNINGS
warehouse

Take This Brochure to the Special Orders Desk to place an order

AUSTRALIAN MADE FOR AUSTRALIAN CONDITIONS

TRIMDECK & KLIP-LOK Roofs

Note: for Trimdeck & Klip-Lok roofs, please order 3040270 GumLeaf's flat 4mm gutter guard and specify which Colorbond colour.

SCREWS: GUMLEAF RECOMMENDS USING GUMLEAF CLASS 4 SCREWS (2410063). WILL LAST A LOT LONGER & ARE GREAT VALUE (on the shelf in Bunnings nearby GumLeaf Gutter Guard).



9 347402 000018

Customer Order Form:

Name: _____

Address: _____

Phone: _____

Item Number	Qty.	Comments / Notes

How to Measure and Order

Measure lengths and add 5–10% for overlap and wastage.



Step 1: Measure the length of the guttering. Add 5-10% for overlap and wastage.

Step 2: For steel roofs decide on the best colour guard for your roof (see Colorbond chart over) then proceed to step 4. For tile roofs there is only one colour, Woodland Grey, as the guard cannot be seen from the ground.

Step 3: For tile roofs measure the gap between the gutter lip and the edge of the tiles (this is called the 'fold'). The fold is usually 70, 80, 90 or 100 mm. **IMPORTANT:** Make sure the bottom row of tiles can be slid back i.e. there are no cyclone clips or nails.

Step 4: On the shelf at Bunnings, GumLeaf's 4mm Corrugated Guard is in Woodland Grey colour and the 4mm Tile Guard has a 90 mm fold. Otherwise go to the special orders desk and ask for GumLeaf Gutter Guard. Tell them the number of pieces you require as well as the colour you wish if your roof is corrugated or if your roof is tile tell them the fold. **NOTE:** 1 piece of guard = 1.2 metres.

Corrugated Roof Installation Instructions



Step 1
Clean out gutters well and flush down pipes.



Step 2
Lay gutter guard so that the chosen colour is facing up. Fold scallops by 30 degrees with thumb and forefinger. Lay in place so that the scallops fit nicely into the corrugation of the roof.



Step 3
Make sure to align the gutter guard nicely along the gutter lip to ensure a clean line along length of gutter edge. Secure the gutter guard to the gutter lip with GumLeaf Screws approximately 300mm apart.



Step 4
Along the scalloped edge place a screw on every 2nd corrugation rise, aligned with the existing roof screws.



Step 5
Interlock the middle of a join of two pieces using a GumLeaf Screw.



Step 6
At the corners run the gutter guard over the hip, then cut and screw to fit as neatly as possible.



Step 7
Apply a thin bead of silicone along all scalloped edges to eliminate small gaps.



Step 8
Stand back and admire your great work.

Tiled Roof Installation Instructions



Step 1
Clean out gutters well and flush down pipes.



Step 2
Slide the first row of tiles back.



Step 3
Lay gutter guard so that the Woodland Grey colour is facing up. Secure to the gutter lip with GumLeaf Screws approximately 300 mm apart. Make sure to align the gutter guard nicely along the gutter lip.



Step 4
Overlap the join of two pieces of gutter guard by approximately 10mm.



Step 5
Interlock the join of two pieces at the back using GumLeaf Screws.



Step 6
Slide tiles back down.



Step 7
At the corners cut the desired length of gutter guard.



Step 8
Fold down the back piece to make a double fold to suit gutter.



Step 9
The piece should fit comfortably into the corner.



Step 10
Screw corner piece down.

GumLeaf's Range



Gutter guard with a 4mm size hole

This is the most popular guard (for good reason) and is suitable for 99% of roofs. Located on the shelf in the Landscape Section of Bunnings as well available at the Special Orders desk for anything else not on the shelf.

Gutter guard with a 2mm size hole

This is suitable for where pine needles or similar are an issue or where a BAL rating is relevant. To order see the Special Orders desk



You're done!

Note: We recommend the product be powder coated if installed within 500 metres of the ocean

Colorbond®

PH 1300 486 532

Full Installation video at
www.diygutterguard.com.au