



MODE 3, TYPE 1 TO TYPE 2

PORTABLE EV CHARGER - INSTRUCTION MANUAL











MODEL: CEVM3T12-32

1 Before Use

- Read all instructions & warnings carefully.
- Check the specifications of your electric vehicle to ensure compatibility.
- Fully uncoil lead prior to charging.
- Check for damage, if damaged in any way DO NOT USE.

2 Intended Use

This product is intended for charging of portable electric vehicles at public charging stations or dedicated charging points.

3 Warnings

- Do not modify this product in any way.
- Do not wire directly into a mains supply.
- Do not submerge in water.
- Do not step on, pull, fold or knot the cable.
- Keep away from high temperature objects during charging.
- Ensure the charging cable is not a tripping hazard during use.
- If this product is damaged in any way cease use immediately, either discard or consult a registered electrician.
- Caution must be taken when using this product to prevent risk of electric shock.

4 Vehicle Compatibility


 COMPATIBLE WITH TYPE 1 CONNECTIONS found on multiple EV makes and models including Mitsubishi, BMW, Nissan, Toyota, Ford, Kia, Opel, Peugeot, Renault and more.

^{*}Not all makes and models will be available in your region. Scan the QR Code on this page for our most up to date model list.



- 1) Uncoil the charging lead, gently remove the socket cap off the Type 2 (Mennekes) plug. Insert plug into charging outlet. Ensure it is securely connected and not loose.
- 2) Gently remove the socket cap off the Type 1 (J1772) plug, connect to your vehicle inlet during this process push the button on the handle to allow the clip to easily seat into place, release the button. Ensure the plug is securely connected and not loose.

NOTE: Do not force into place, if there are any obstructions take caution and remove them before inserting the plug.

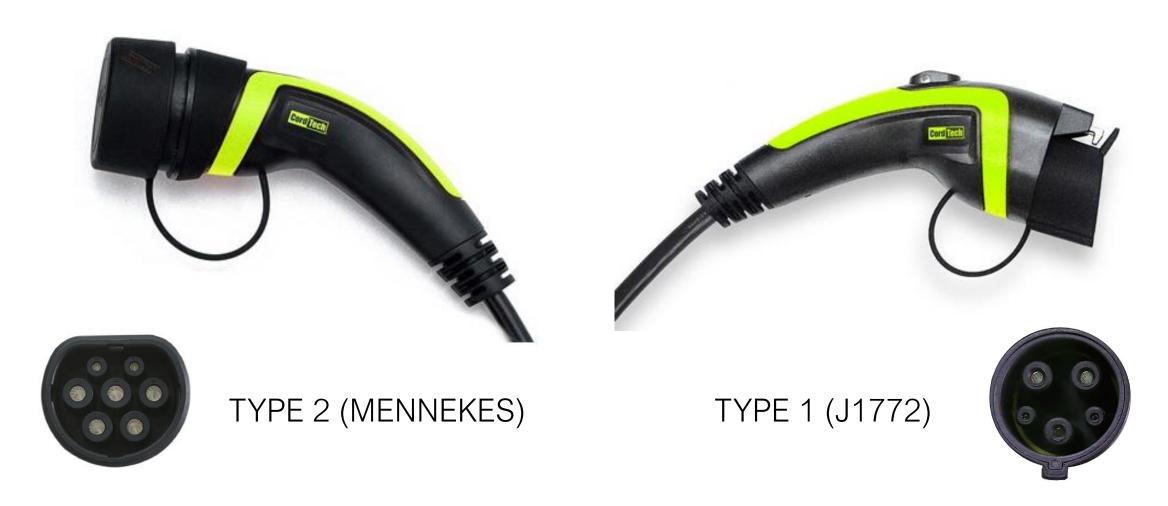

6 Stop Charging

- 1) Push the button on the handle and disconnect the Type 1 plug from the vehicle inlet.
- 2) Close the protective cap of vehicle inlet.
- 3) Place the protective cap onto the Type 1 (J1772) plug.
- 4) Disconnect the Type 2 plug from the charging outlet.
- 5) Place the protective cap onto the Type 2 plug.
- 6) Store your Charging cable.



CEVB – Storage Bag (Sold Separately)

CordTech 5M EV Cable Type 1 To 2 (32A)	
Model	CEVM3T12-32 (012-32S)
Rated Power	7.4Kw Max
Input Voltage	AC 230V+-20%
IP Rating	Type 1 Connector: IP55
	Type 2 Connector: IP55
Operating Temp	-30°C~+50°C
Storage Temp	-40°C~+80°C
Operating Humidity	20%-85%

8 Maintenance

- Wipe clean regularly, do not use abrasive chemicals or detergents.
- Ensure the product is stored in a dry location.

DISTRIBUTED BY:

MOTIV INDUSTRIES www.motiv.co.nz