
#### AQUAMAX GAS WAIER HEAIER SPECIFICATIONS

### **SPECIFICATIONS**

Number of people Served Model Gas type Cylinder Capacity Nominal gas consumption **AGA Star Rating Index** Recovery rate at 45°C rise Installation type Pressure & Temperature Relief Valve setting Max. water supply pressure w/o ECV Cylinder material Water inlet connection Water outlet connection Gas connection Warranty (Cylinder)1 WaterMark Licence No. Overall height Width (approx.) Depth (approx.) AGA Approval No. Weight (packaged)


G390 SS (WITH MIXING VALVE)	G340 SS	G270 SS
3-6	2-5	2-4
G390SS	G340SS	G270SS
Natural	Natural	Natural
155 Litres	155 Litres	130 Litres
40 MJ/Hr	40 MJ/Hr	33 MJ/Hr
5 Stars	5 Stars	5 Stars
185 Litres/Hr <sup>2</sup>	185 Litres/Hr <sup>2</sup>	145 Litres/Hr <sup>2</sup>
External only	External only	External only
1400 kPa/99°C	1400 kPa/99°C	1400 kPa/99°C
1120 kPa	1120 kPa	1120 kPa
stainless steel	stainless steel	stainless steel
Rp 3/4" Female	Rp 3/4" Female	Rp 3/4" Female
Rp 3/4" Female	Rp 1/2" Female	Rp 1/2" Female
1/2" flared compression	1/2" flared compression	1/2" flared compression
12 years	12 years	12 years
WMKA00200	WMKA00200	WMKA00200
1625mm	1635mm	1410mm
520mm	520mm	475mm
610mm	610mm	565mm
AGA6114G	AGA6114G	AGA7477G
65 kg	64 kg	49 kg
\(\frac{\gamma}{2}\)	·	·

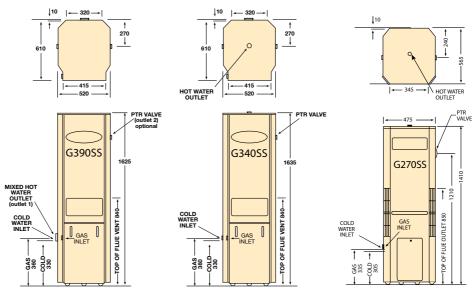

- 1 Warranty: 12 years on cylinder, 3 years parts and labour on cylinder, 1 year parts and labour on all other components, when installed in a domestic dwelling. For all other installations, warranty period is one year parts and labour on all components. Warranty applies to product manufactured on or after 09/04/2018. Conditions apply, see the AquaMax warranty set out in the Owner's Guide and Installation Instructions or view at www.aquamax.com.au
- 2 Based on cold water temperature of 15°C
- 2 Stock of control water campended or installation in some areas. Refer to the AquaMax website for details of areas not recommended for installation in some areas. Refer to the AquaMax website for details of areas not recommended and for which product is not covered by warranty.

Aquamax Australia Pty Ltd 463-467 Warrigal Road Moorabbin Vic 3189 Toll Free: 131 031 Sales Ph: 132 552 Sales Fax: 1300 554 821

Email: sales@aquamax.com.au For more information visit www.aquamax.com.au



A.B.N. 37 138 189 689

® Registered Trademark of AquaM/
Materials, product data and specifica



# STAR PERFORMERS FROM AQUAMAX

AquaMax gas water heaters offer you more than just 5 Star energy efficiency.

With Stainless Steel cylinders across the range they are the preferred choice for homeowners and plumbers alike.

Providing hot water recovery of up to 185 litres per hour, there is an AquaMax model to suit even the largest household.











## **OUTSTANDING FEATURES**

#### **5 STAR ENERGY EFFICIENCY**

to help you save on energy bills

#### STAINLESS STEEL CYLINDERS

can resist corrosion for longer than conventional enamelled steel cylinders<sup>3</sup>

#### 12 YEAR CYLINDER WARRANTY<sup>1</sup>

# HOT WATER RECOVERY FROM 145 TO 185 LITRES AN HOUR<sup>2</sup>

to have you back in hot water faster, and also handy in times of heavy hot water demand

#### SIGNIFICANTLY LIGHTER

than traditional enamelled steel cylinder water heaters, which assists in easier installation

#### NO ANODE REQUIRED

so reducing lifetime service costs

#### **INBUILT MIXING VALVE**

on AquaMax G390SS so you can adjust the hot water delivery to as much as 205L in an hour (depending on temperature chosen)\*

\*NOTE: the inbuilt mixing valve is not an approved temperature limiting device. Applications requiring tempering to comply with AS3498 must have a tempering valve installed in accordance with AS3500.4

